




TECHNICAL DATASHEET

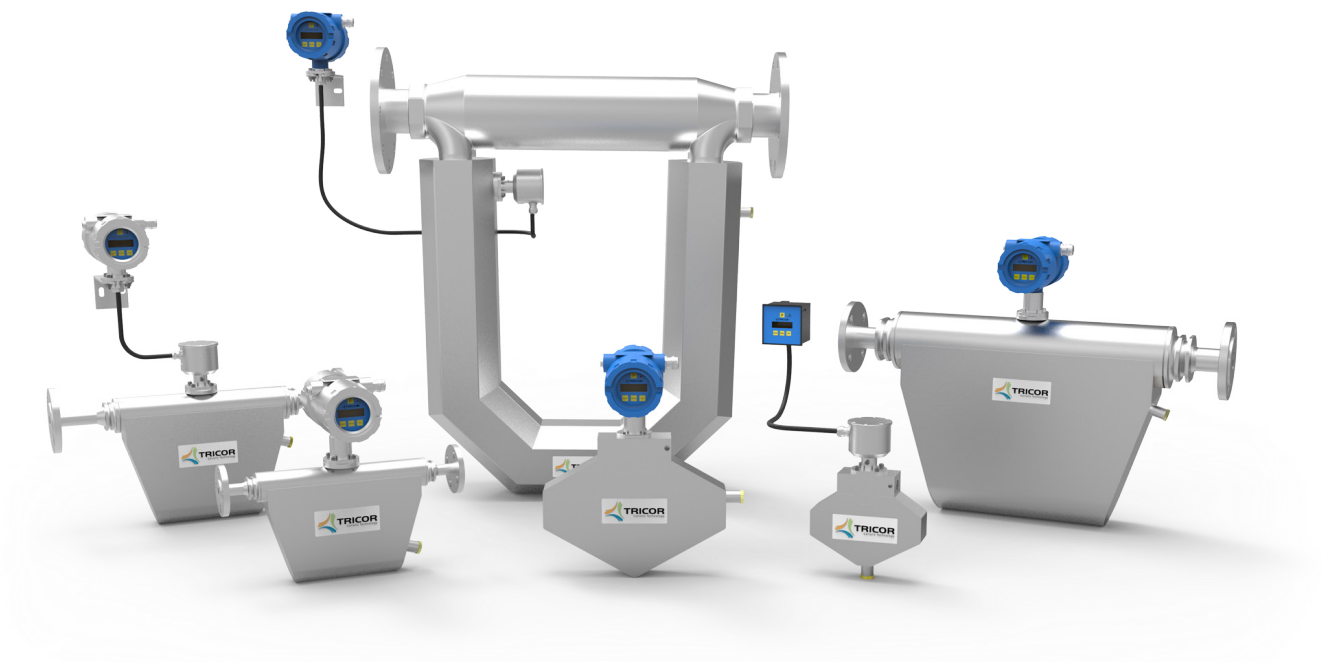

The TCM CLASSIC product line meets general industrial requirements out of the box.

- TCE 8000 transmitters with an easy-to-use interface
- Economically-priced, non-calibrated but with excellent repeatability
- Optional custom-calibrated meters with high performance specifications



Our passion is
your Process

CONTENT

Description, Principle of operation	02
Product Overview	03
TCM Sensor – Technical Data for Liquids	04
Accuracy for Liquids	05
TCM Sensor – Technical Data for Gases	06
Accuracy for Gases	07
TCE 8000/8100 Transmitter – Technical Data	08
TCE 6000 Transmitter – Technical Data	09
TRD 8001 Remote Display - Technical Data	09
Dimensional Drawings	10
Ordering Code TCM Meter (TRICOR CLASSIC Series)	17
Ordering Code TCE Transmitter (Series 8XXX)	07
Process Connections	19
TRICOR Connection Cable (TCC) for Panel-Mounted Housing	25
Additional Accessories	25
Contact	26

DESCRIPTION

The TRICOR Coriolis Mass Flow Meters from TASI Flow are absolutely reliable and robust sensors in a variety of processes, performing multiple measurements simultaneously with customizable process parameters and multiple communication languages. The TRICOR production team mechanically balances every meter, assuring the dual tubes are dynamically aligned and in perfect balance before flow begins. The unique design and cutting edge manufacturing procedures ensure a meter with the highest resistance to external influences.

FEATURES


- All-in-one instrument: direct measurement of mass flow, density and temperature, calculated measurement of volumetric flow
- No moving parts: low maintenance, no need for recalibration
- Easy to install: no straight run of pipe required and multiple mounting options available
- Mechanically balanced tubes and superior mechanical design for best-in-class density measurement
- Exceptional mechanical design resists external interference
- API gravity reading in software
- Exceptional ease of use and fast setup time: we will pre-program your process parameters
- Frequency output up to 10,000 Hz resolution
- Superior meter calibration: DAKKS-Accreditation as per DIN EN ISO/IEC 17025:2005
- Easily accessible, integrated meter diagnostics to verify meter health & performance
- Hazardous area certifications: ATEX, IECEx, cCSAus, EAC (TR-CU)
- Customized process connections available

ADDITIONAL OPTIONS

- Net Oil software
- High pressure designs available up to 345 bar [5,000 psi]
- Special calibrations for an oil viscosity up to 100 mm²/s
- Integrated pressure compensation
- Customizable installation length
- Extended warranty

PRINCIPLE OF OPERATION

Coriolis Mass Flow Meters (TCM) operate with two parallel tubes with coils that cause them to oscillate at their resonance frequency. Should a measurement flow enter the measuring tube, Coriolis forces appear in oscillating systems when a mass moves towards or away from a rotational axis. These forces act on the inlet and outlet side in the opposite direction and minimally deform the measuring tubes. The deflection of the measurement tubes is captured by sensors on the inflow and outflow side. These two sensors measure a phase shift that is proportional to the mass flow. The resonance frequency of the tubes varies depending on the density of the medium to be measured. This effect is used to measure the density of the medium. Since the elastic properties of the flow tubes depend on the temperature, a temperature measurement is carried out for compensation. The primary characteristics such as mass flow rate, density and temperature are measured with a single flow meter. The volume flow can be determined based on the mass flow rate and density.

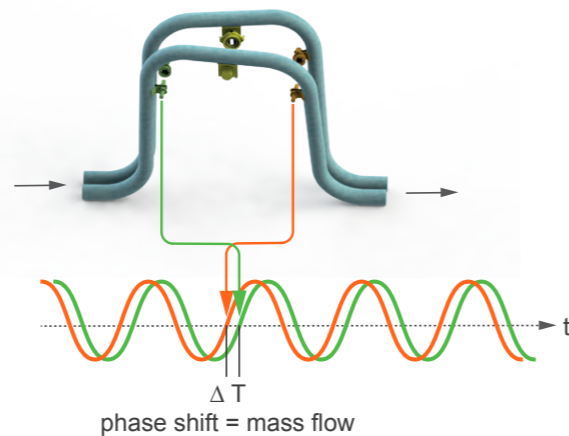

PRODUCT OVERVIEW

Compact version



Exd housing: Wall mounted (remote version)



Version with TCE 6000 (including options)





Housing: Panel mounted (remote version)



TCM SENSOR – TECHNICAL DATA FOR LIQUIDS

	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
Max. Flow Rate (kg/h)	325	650	1,550	3,100	5,500	7,900	28,000	65,000	230,000
Max. Flow Rate (lb/min)	12	24	57	114	202	290	1,029	2,388	8,450
Basic Accuracy (Mass Flow)	±0.3 % of flow rate (option: up to 0.1 % of flow rate)								
Basic Accuracy (Volume Flow)	±0.4 % of flow rate (option: up to 0.15 % of flow rate)								
Repeatability	±0.05 % of flow rate								
Zero Stability	±0.01 % of full scale								
Density Range	up to 2,500 kg/m ³ [2.5 g/cm ³] (higher ranges on request)								
Density Accuracy	±5.0 kg/m ³ [±0.005 g/cm ³] (option: ±1.0 kg/m ³ [±0.001 g/cm ³])								
Density Repeatability	±0.5 kg/m ³ [±0.0005 g/cm ³]								
Process Temperature Range	±1 °C ±0.5 % of reading [±1.8 °F ±0.5 % of reading]								
Temperature Repeatability	±0.2 °C [±0.36 °F]								
Process and Ambient									
Process Connections	female thread ½" adaptors for flanges, dairy and tri-clamp			flanges EN1092, ANSI B16.5, DIN2512, threaded tri-clamp					
Max. Pressure Standard	200 bar [2,900 psi] option: up to 345 bar [5,000 psi] (not for ASME)			100 bar [1,450 psi]					
Pressure Drop at max. Flow	for detail information please contact us								
Process Temperature (non Ex)	-40 °C ... +100 °C [-40 °F ... +212 °F] (standard) -40 °C ... +150 °C [-40 °F ... +302 °F] (option) -60 °C ... +200 °C [-76 °F ... +392 °F] (option)								
Process Temperature (Ex)	meter mount	-40 °C ... +70 °C [-40 °F ... +158 °F] (T4)						n/a	
	remote version	-40 °C ... +70 °C [-40 °F ... +158 °F] (T4) -40 °C ... +135 °C [-40 °F ... +275 °F] (T3) -60 °C ... +200 °C [-76 °F ... +392 °F] (T2)							
Ambient Temperature	-40 °C ... +70 °C [-40 °F ... +158 °F]								
Storage Temperature	-40 °C ... +100 °C [-40 °F ... +212 °F]								
Electr. Connections Remote	screw type terminals								
Electr. Connections Meter Mount	none (internally connected to the electronics)								
Ingress Protection	IP65 (IP66/IP67 on request)								
General									
Tube Arrangement	2 serial	2 parallel	2 serial	2 parallel	2 parallel	2 parallel	2 parallel	2 parallel	2 parallel
Tube Inner Diameter	4 mm	4 mm	8 mm	8 mm	7 mm	9 mm	16 mm	28 mm	43 mm
Tube Material	1.4404 [AISI 316L]								
Housing Material	1.4404 [AISI 316L]								
Dimensions	see dimensional drawings (page 10 - 11)								

ACCURACY FOR LIQUIDS

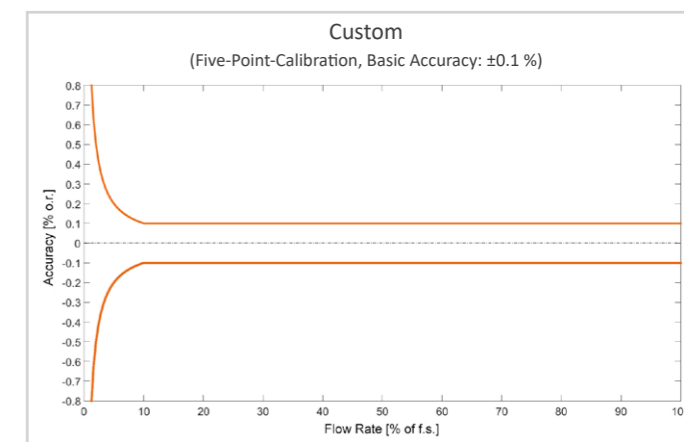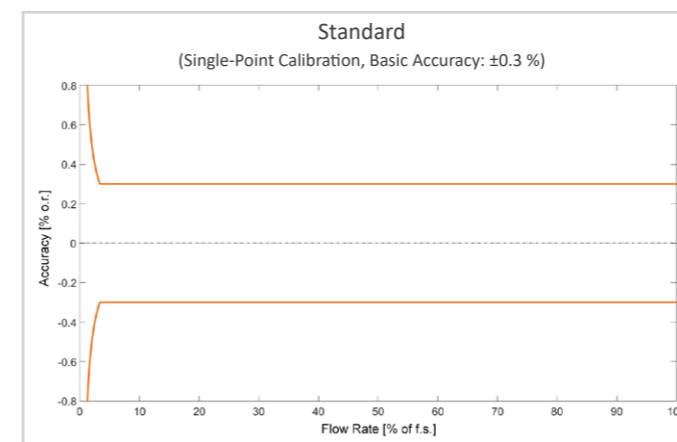

Flow Rate of Full Scale	Accuracy
$\geq \frac{\text{Zero Point}}{\text{Basic Accuracy}} * 100$	± Basic Accuracy
$< \frac{\text{Zero Point}}{\text{Basic Accuracy}} * 100$	$\pm \frac{\text{Zero Point}}{\text{Measured Value}} * 100$

Example for a standard TCM 0325 (Single-Point Calibration, Basic Accuracy: ±0.3 %)

325 kg/h * Zero Point (0.01 %) = 0.0325 kg/h
[12 lb/min * 0.01 % = 0.0012 lb/min]

325 kg/h * Basic Accuracy (0.3 %) = 0.975 kg/h
[12 lb/min * 0.3 % = 0.036 lb/min]

Result:
(0.0325 / 0.975) * 100 = 3.33 % (10.8 kg/h)
[(0.0012 / 0.036) * 100 = 3.33 % (0.4 lb/min)]

All Flow Rates \geq 3.33 % or 10.8 kg/h (0.4 lb/min):
Measured Error = Basic Accuracy

All Flow Rates $<$ 3.33 % or 10.8 kg/h (0.4 lb/min):
Measured Error = (Zero Point / Measured Value) * 100

Example for a custom TCM 0325 (Five-Point Calibration, Basic Accuracy: ±0.1 %)

325 kg/h * Zero Point (0.01 %) = 0.0325 kg/h
[12 lb/min * 0.01 % = 0.0012 lb/min]

325 kg/h * Basic Accuracy (0.1 %) = 0.325 kg/h
[12 lb/min * 0.1 % = 0.012 lb/min]

Result:
(0.0325 / 0.325) * 100 = 10 % (32.5 kg/h)
[(0.0012 / 0.012) * 100 = 10 % (1.2 lb/min)]

All flow rates \geq 10 % or 32.5 kg/h (1.2 lb/min):
Measured error = Basic Accuracy

All flow rates $<$ 10 % or 32.5 kg/h (1.2 lb/min):
Measured error = (Zero Point / Measured Value) * 100

Calibration for Liquids and Gases: The TRICOR flowmeters are always factory calibrated with water.
Calibration Conditions: Water: 20 °C ... 25 °C [68 °F ... 77 °F], ambient temperature: 20 °C ... 25 °C [68 °F ... 77 °F].
All specifications are based on above mentioned calibration reference conditions, a flow calibration protocol is attached to each instrument.
Stated accuracy combines the effects of repeatability, linearity and hysteresis.
Typical flow dynamics based on max. flow rate is 100:1.





TCM SENSOR – TECHNICAL DATA FOR GASES

	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
Nom. Flow Rate (kg/h) ^{1) 3)}	78	177	333	740	910	1,430	5,100	15,650	48,900
Nom. Flow Rate (lb/min) ^{1) 3)}	3	7	12	27	34	53	188	575	1,797
Nom. Flow Rate (Nm ³ /h) ^{1) 2)}	109	247	464	1,031	1,268	1,993	7,109	21,813	68,157
Nom. Flow Rate (SCFM) ^{1) 2)}	64	146	273	607	747	1,173	4,184	12,838	40,115
Basic Accuracy	±1 % of flow rate (option: up to ±0.5 % of flow rate)								
Repeatability	±0,25 % of flow rate								
Zero Stability (kg/h)	0.0325	0.065	0.155	0.31	0.55	0.79	2.8	6.5	23
Zero Stability (lb/min)	0.0012	0.0024	0.0057	0.0114	0.020	0.029	0.103	0.239	0.845
Density Range	see comment ³⁾								
Density Accuracy	±5.0 kg/m ³ [±0.005 g/cm ³] (option: ±1.0 kg/m ³ [±0.001 g/cm ³])								
Density Repeatability	±0.5 kg/m ³ [±0.0005 g/cm ³]								
Process Temperature Range	±1 °C ±0.5 % of reading [±1.8 °F ±0.5 % of reading]								
Temperature Repeatability	±0.2 °C [±0.36 °F]								
Prozess-/Umgebungsbedingungen									
Process Connections	female thread ½" adaptors for flanges, dairy and tri-clamp			flanges EN1092, ANSI B16.5, DIN2512, threaded tri-clamp					
Max. Pressure Standard	200 bar [2,900 psi] option: up to 345 bar [5,000 psi] (not for ASME)					100 bar [1,450 psi]			
Pressure Drop at max. Flow	for detail information please contact us								
Process Temperature (non Ex)	-40 °C ... +100 °C [-40 °F ... +212 °F] (standard) -40 °C ... +150 °C [-40 °F ... +302 °F] (option) -60 °C ... +200 °C [-76 °F ... +392 °F] (option)								
Process Temperature (Ex)	meter mount	-40 °C ... +70 °C [-40 °F ... +158 °F] (T4)						n/a	
	remote version	-40 °C ... +70 °C [-40 °F ... +158 °F] (T4) -40 °C ... +135 °C [-40 °F ... +275 °F] (T3) -60 °C ... +200 °C [-76 °F ... +392 °F] (T2)							
Ambient Temperature	-40 °C ... +70 °C [-40 °F ... +158 °F]								
Storage Temperature	-40 °C ... +100 °C [-40 °F ... +212 °F]								
Electr. Connections Remote	screw type terminals								
Electr. Connections Meter Mount	none (internally connected to the electronics)								
Ingress Protection	IP65 (IP66/IP67 on request)								
General									
Tube Arrangement	2 serial	2 parallel	2 serial	2 parallel	2 parallel	2 parallel	2 parallel	2 parallel	2 parallel
Tube Inner Diameter	4 mm	4 mm	8 mm	8 mm	7 mm	9 mm	16 mm	28 mm	43 mm
Tube Material	1.4404 [AISI 316L]								
Housing Material	1.4404 [AISI 316L]								
Dimensions	see dimensional drawings (page 10 - 11)								

Max. allowed flow velocity (Ma 0.5).
For gas applications, flow rate and pressure drop for individual sensor sizes are dependent on operating temperature, pressure and fluid composition. Therefore, when selecting a sensor for any particular gas application, please use the TSP (TRICOR Sizing Program) or contact us.
¹⁾ Nominal flow rates that produce approximately 3 bar [43 psi] pressure drop for natural gas at 50 bar [725 psi] operational pressure.
²⁾ Normal reference conditions (Nm³/h) are 1,013 bar and 0 °C. Standard (SCFM) reference conditions are 14.7 psi and 60 °F.
³⁾ Flow rate and density range depend on the gas density and the pressure range.

ACCURACY FOR GASES

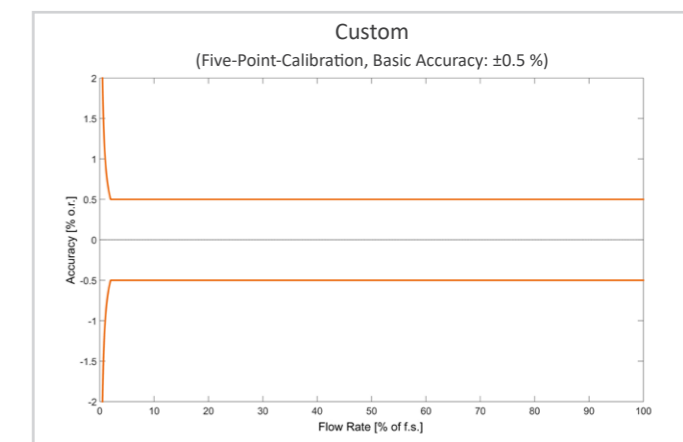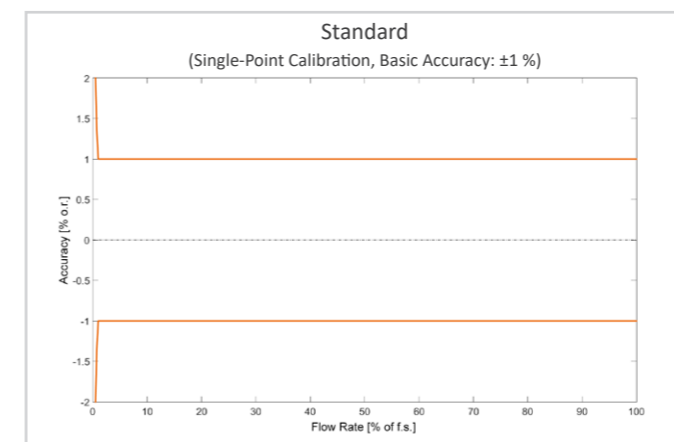

Flow Rate of Full Scale	Accuracy
$\geq \frac{\text{Zero Point}}{\text{Basic Accuracy}} * 100$	± Basic Accuracy
$< \frac{\text{Zero Point}}{\text{Basic Accuracy}} * 100$	$\pm \frac{\text{Zero Point}}{\text{Measured Value}} * 100$

Example for a standard TCM 0325 (Single-Point Calibration, Basic Accuracy: ±1 %)

325 kg/h * Zero Point (0.01 %) = 0.0325 kg/h
[12 lb/min * 0.01 % = 0.0012 lb/min]

325 kg/h * Basic Accuracy (1 %) = 3.25 kg/h
[12 lb/min * 1 % = 0.12 lb/min]

Result:
(0.0325 / 3.25) * 100 = 1 % (3.25 kg/h)
[(0.0012 / 0.12) * 100 = 1 % (0.12 lb/min)]

All Flow Rates \geq 1 % or 3.25 kg/h (0.12 lb/min):
Measured Error = Basic Accuracy

All Flow Rates $<$ 1 % or 3.25 kg/h (0.12 lb/min):
Measured Error = (Zero Point / Measured Value) * 100

Example for a custom TCM 0325 (Five-Point Calibration, Basic Accuracy: ±0.5 %)

325 kg/h * ZeroPoint (0.01%) = 0.0325 kg/h
[12 lb/min * 0.01 % = 0.0012 lb/min]

325 kg/h * Basic Accuracy (0.5 %) = 1.625 kg/h
[12 lb/min * 0.5 % = 0.06 lb/min]

Result:
(0.0325 / 1.625) * 100 = 2 % (6.5 kg/h)
[(0.0012 / 0.06) * 100 = 2 % (0.24 lb/min)]

All flow rates \geq 2 % or 6.5 kg/h (0.24 lb/min):
Measured error = Basic Accuracy

All flow rates $<$ 2 % or 6.5 kg/h (0.24 lb/min):
Measured error = (Zero Point / Measured Value) * 100

EX CERTIFICATIONS

ATEX (Ex)	Zone 1: Group IIC or IIB, T2...T4
ATEX (Exn)	Zone 2: II 3G Ex nA IIC T2...T4 Gc
IECEX (Ex)	Zone 1: Group IIC or IIB, T2...T4
cCSAus (Ex1) ⁴⁾	Class 1, Division 1: Group A, B, C, D or C, D, T2...T4
ATEX + IECEX + cCSAus triple approval (Ex3) ^{4) 5)}	Zone 1: Group IIC or IIB, T2...T4 and Class 1, Division 1: Group A, B, C, D or C, D, T2...T4
EAC (TR-CU) ⁴⁾	Group IIC or IIB, T2 ... T4

⁴⁾ For Ex1, Ex3, EAC (TR-CU) the electronic is only available in aluminum housing.
⁵⁾ Only with remote electronics.



TCE 8000/8100 TRANSMITTER – TECHNICAL DATA

General	
Display	back-lit LCD screen, 132 x 32 dot
Supply Voltage	24 V DC, ±20 % or 90 ... 264 V (version dependent)
Programming	via front keyboard or Windows-based TRICOR configurator program (Modbus)
Interface	RS485 (Modbus-RTU), option HART®, Foundation Fieldbus®, other options on request
EMV	according to EN 61000-6-4 and 61000-6-2
Power Consumption	max. 6 W
ExD Housing: Wall-mounted	
Dimensions	see dimensional drawing (page 12 - 13)
Electrical Connections	cage clamp terminals
Cable Glands	for 7-13 mm cables
Housing Material	aluminum diecast (option: 1.4404 [AISI 316L])
Protection Class	IP65 (IP66/IP67 on request)
Weight	with aluminum diecast housing: 3.8 kg [8.3 lb] with 3 m cable with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb]
Temperature	ambient: -40 °C ... +70 °C [-40 °F ... +158 °F] storage and transport: -40 °C ... +80 °C [-40 °F ... +176 °F]
Housing: Panel-mounted (only TCE 8000)	
Dimensions	see dimensional drawing (page 15)
Electrical Connections	cage clamp terminals
Housing Material	Noryl
Protection Class	front: IP50, rear: IP30
Weight	0.4 kg [0.88 lb]
Temperature	ambient: ±0 °C ... +60 °C [32 °F ... +140 °F] storage and transport: -20 °C ... +70 °C [-4 °F ... +158 °F]
Analog Output	
Current Outputs (2x)	4 ... 20 mA passive, two-wire, isolated
Resolution	14 bit
Linearity	±0.05 % of full scale
Temperature Drift	0.05 % per 10 K
Load	< 620 Ω (at 24 V supply)
Output Value	programmable: flow, total, density, temperature
Pulse Output	
Frequency Range	0.5 - 10,000 Hz (in TOTAL mode: 0 - 100 Hz)
Output Signal	active push pull output for flow rate
Status In- and Output	
Status Output	push pull programmable (in FREQUENCY mode: 0.5 - 10,000 Hz)
Control Input	programmable
Analog Input (option)	
Input Type	4 ... 20 mA active for two-wire passive pressure sensor
Resolution	12 bit
Linearity	±0.05 % of full scale
Temperature Drift	0.05 % per 10 K
Supply Voltage	> 20 V (at 20 mA sensor current)

TCE 6000 TRANSMITTER – TECHNICAL DATA

General	
Supply Voltage	24 V DC, ±20 %
Programming	via TRD 8001 or via interface
Interface	RS485, USB (option)
EMC	according to EN 61000-6-4 and EN 61000-6-2
Power Consumption	max. 4 W
Dimensions	see dimensional drawing (page 15)
Electrical Connections	connectors M12
Housing Material	aluminum diecast
Temperature	ambient: -40 °C ... +70 °C [-40 °F ... +158 °F] storage and transport: -40 °C ... +80 °C [-40 °F ... +176 °F]
Protection Class	IP65
Analog Output	
Current Output	4 ... 20 mA active
Resolution	14 bit
Linearity	±0.05 %
Temperature Drift	0.05 % per 10 K
Load	< 800 Ω
Output Value	programmable: flow, total, density, temperature
Pulse Output	
Frequency Range	0.5 - 10,000 Hz (for ESTA (OPTV receiver) 0.5 - 5,000 Hz)
Output Signal	active push pull output for flow rate, optional: insulated optical frequency output
Status In- and Output	
Status Output	push pull programmable (option) (in TOTAL mode: 0.5 - 100 Hz)
Control Input	programmable (standard: 1 input/option: 2 inputs) option: insulated optical control input


Note: For parameterization of the flow meter, the interface may be used. Prerequisite: Parameter setting is not allowed during active ESTA operation.

TRD 8001 REMOTE DISPLAY – TECHNICAL DATA

Display	back-lit LCD screen, 132 x 32 dot
Supply Voltage	via interface
Programming	via front keyboard
Interface to TCE	RS485
EMC	according to EN 61000-6-4 and 61000-6-2
Dimensions	see dimensional drawing (page 16)
Electrical Connections	connectors M12
Housing Material	ABS-FR (plastic, flame retardant)
Protection Class	IP64
Weight	0.4 kg [0.88 lb]
Temperature	operation: ±0 °C ... +60 °C [32 °F ... +140 °F] storage and transport: -20 °C ... +80 °C [-4 °F ... +176 °F]
Wall Mount	hidden screws




TCM 0325 TO TCM 0650

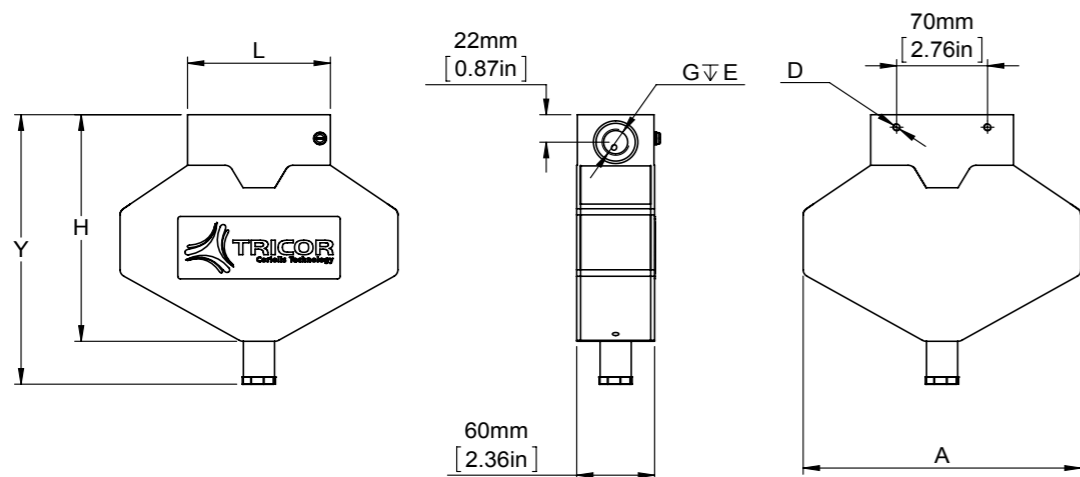


Sensor Type	A	D	E	G ⁶⁾	H	L ⁷⁾	Y
TCM 0325	214 mm [8.43 in]	M6 ∇ 10	15 mm [0.59 in]	G 1/2"	182 mm [7.17 in]	110 mm [4.33 in]	216 mm [8.50 in]
TCM 0650	214 mm [8.43 in]	M6 ∇ 10	15 mm [0.59 in]	G 1/2"	182 mm [7.17 in]	110 mm [4.33 in]	216 mm [8.50 in]

TCM 1550 TO TCM 3100

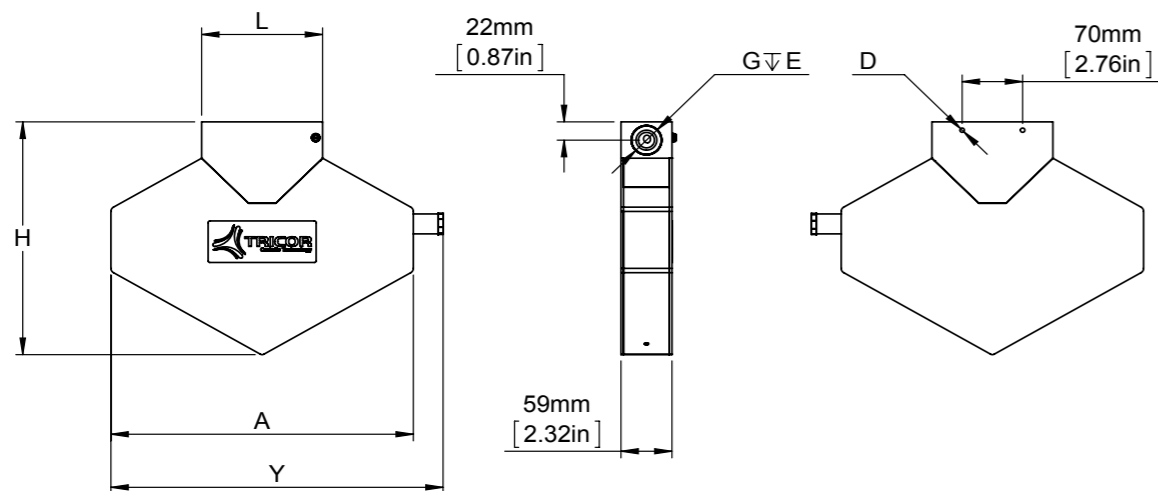


Sensor Type	A	D	E	G ⁶⁾	H	L ⁷⁾	Y
TCM 1550	350 mm [13.78 in]	M6 ∇ 10	18 mm [0.71 in]	G 1/2"	280 mm [11.02 in]	140 mm [5.51 in]	384 mm [15.12 in]
TCM 3100	350 mm [13.78 in]	M6 ∇ 10	18 mm [0.71 in]	G 1/2"	280 mm [11.02 in]	140 mm [5.51 in]	384 mm [15.12 in]

TCM 5500 TO TCM 065K

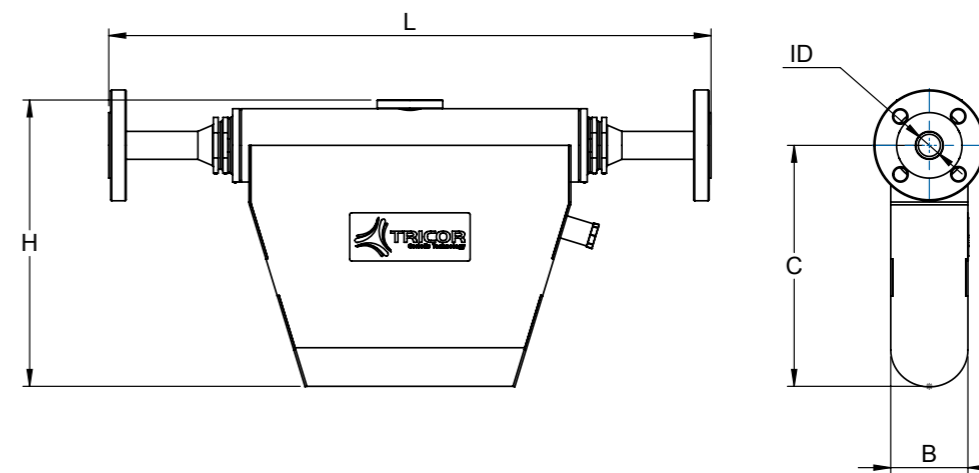

Sensor Type	B	C	H	L ⁸⁾	I.D.	Connection
TCM 5500, 7900	61 mm [2.40 in]	204 mm [8.03 in]	260 mm [10.24 in]	460 mm [18.11 in]	∅ 13 mm [∅ 0.51 in]	on request
TCM 028K	80 mm [3.15 in]	253 mm [9.96 in]	315 mm [12.40 in]	625 mm [24.61 in]	∅ 23 mm [∅ 0.91 in]	on request
TCM 065K	151 mm [5.94 in]	387 mm [15.24 in]	480 mm [18.90 in]	830 mm [32.68 in]	∅ 40 mm [∅ 1.57 in]	on request

TCM 230K

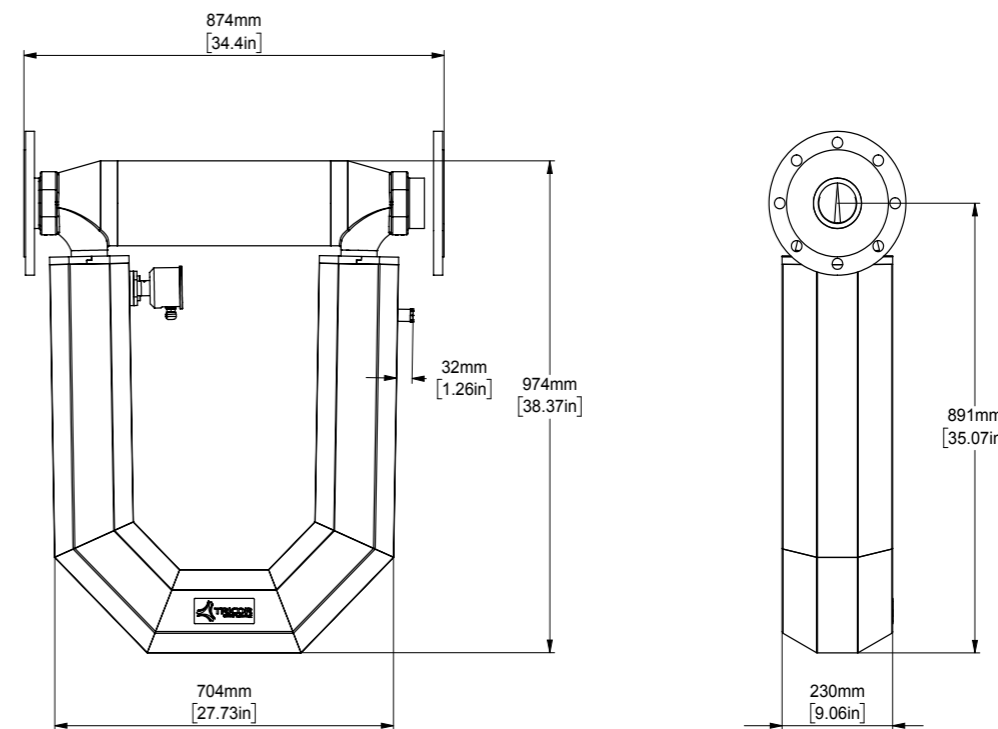


⁸⁾ Further lengths on request.


⁶⁾ Other connections on request.
⁷⁾ Further lengths on request.




METER-MOUNT ELECTRONICS TCE 8000/8100

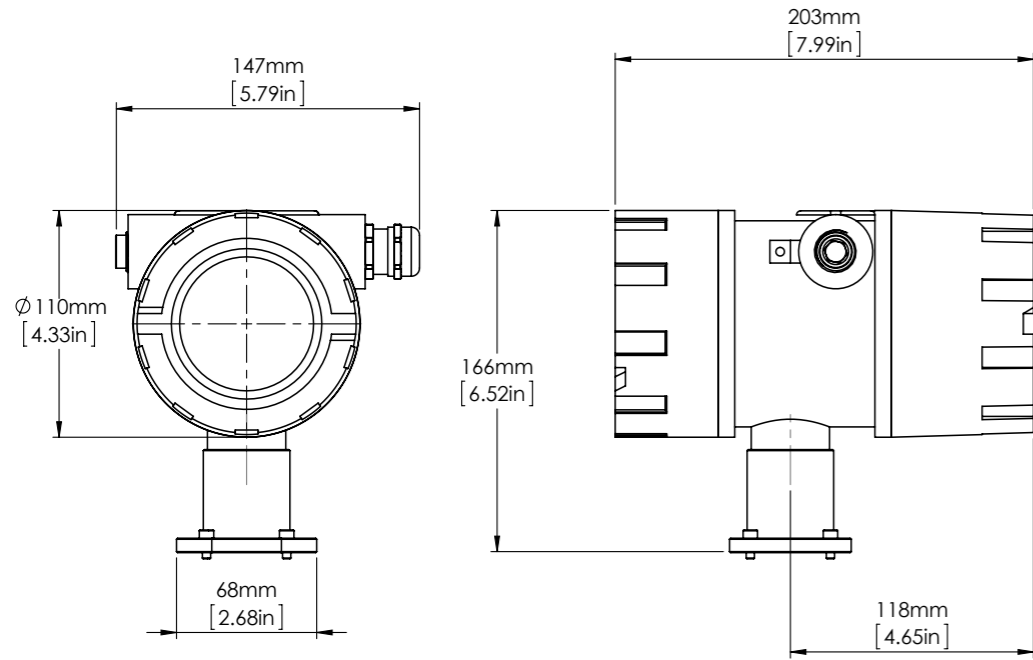


METER-MOUNT ELECTRONICS TCE 8000/8100 WITH BLIND COVER

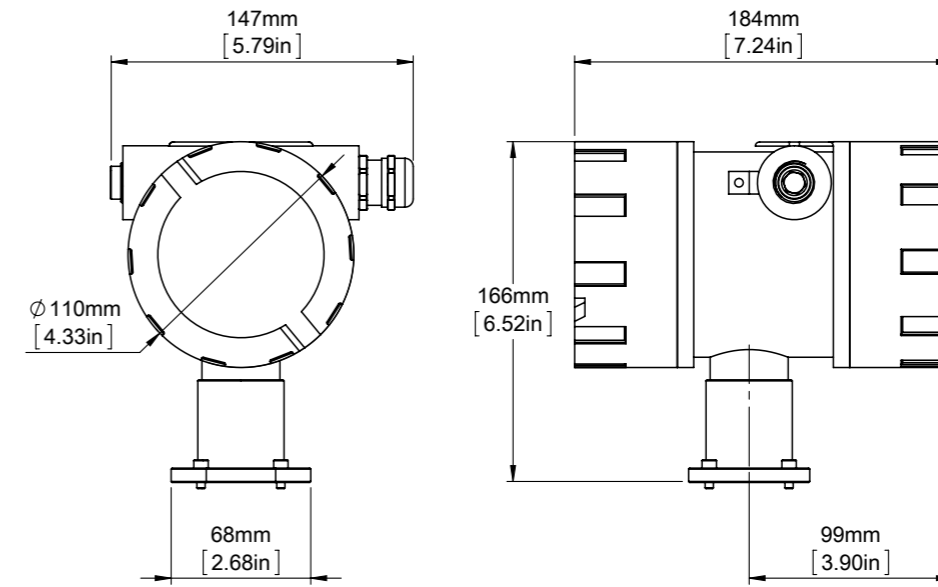

WALL-MOUNT ELECTRONICS TCE 8000/8100

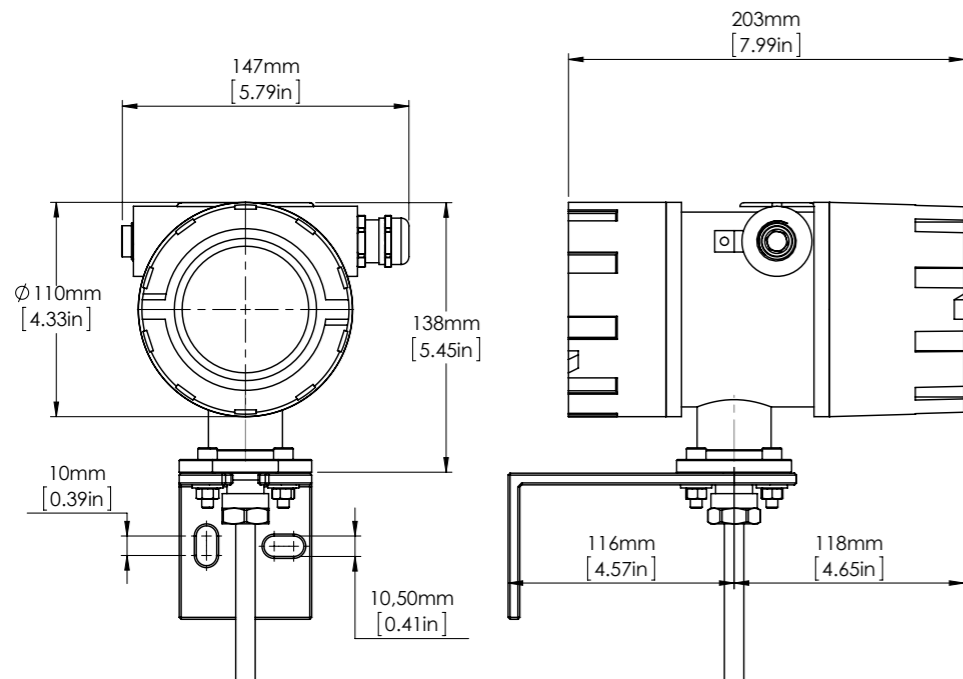


METER-MOUNT ELECTRONICS TCE 8000/8100 HIGH TEMPERATURE

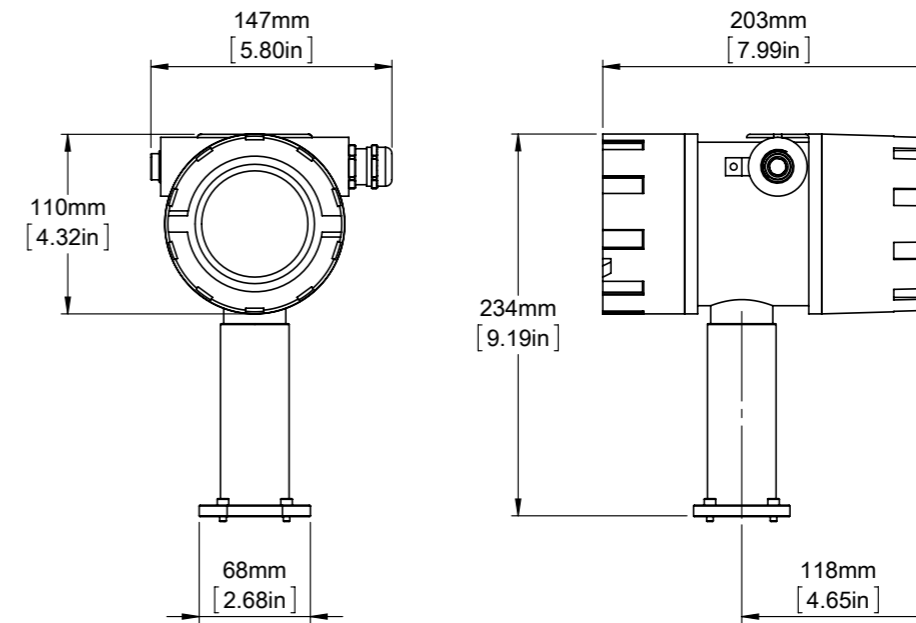





STANDARD CONNECTION HEAD (A)

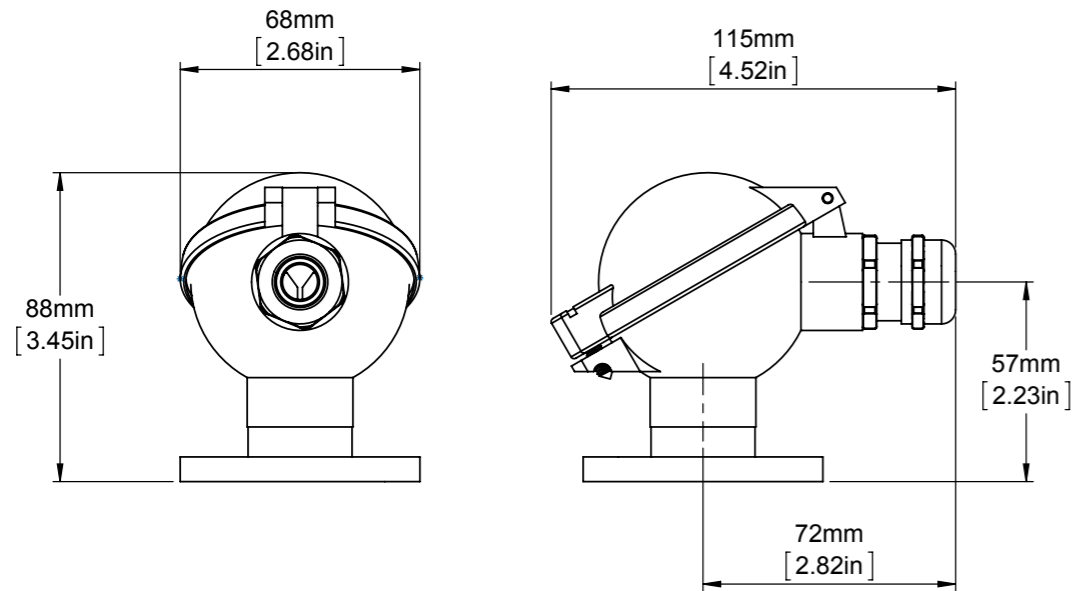


PANEL-MOUNTED HOUSING

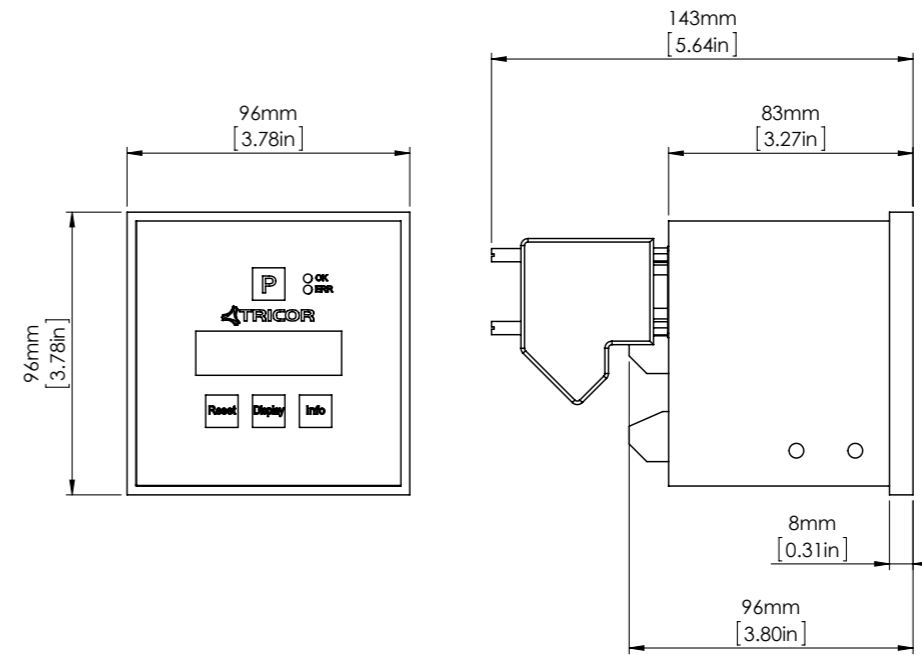

HIGH TEMPERATURE CONNECTION HEAD (H)

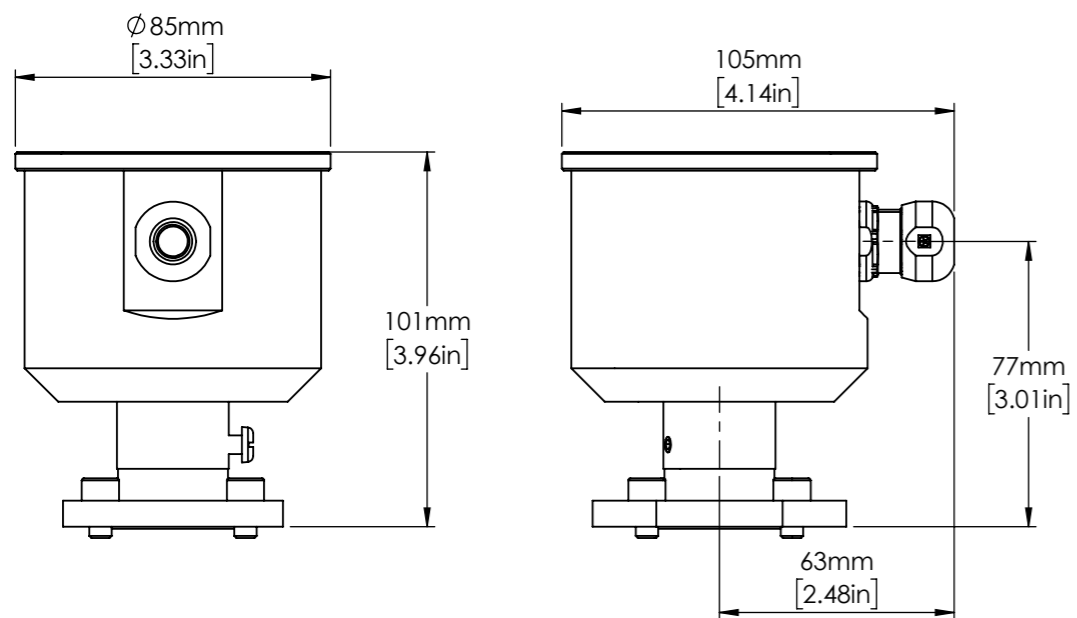


METER-MOUNT ELECTRONICS TCE 6000 (F)

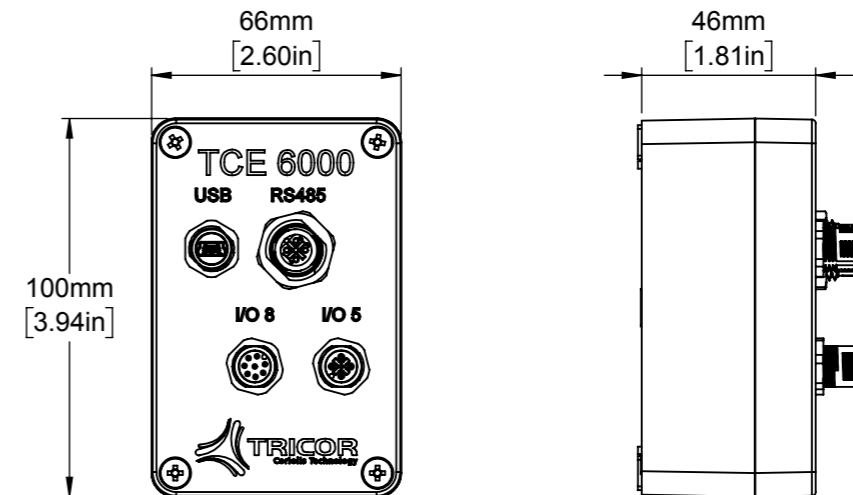



REMOTE DISPLAY TRD 8001

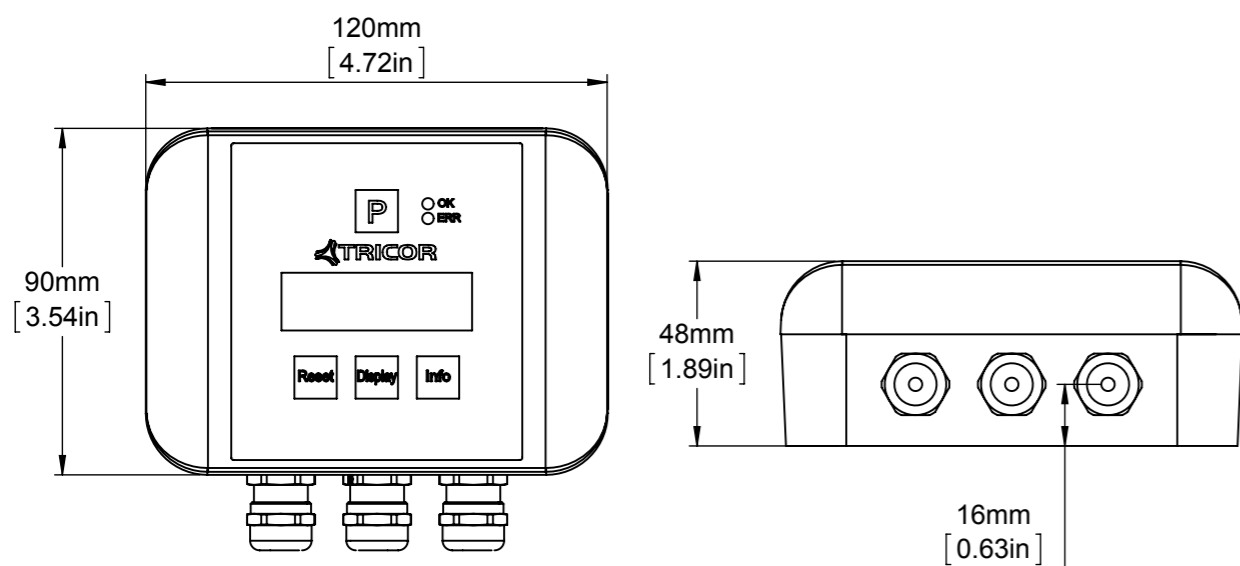

ORDERING CODE TCM METER (TRICOR CLASSIC SERIES)

	TCM	XXXX	-	XX	-	X	X	X	X	-	X	X	X	X	-	Ex	-	XX
Process Connections⁹⁾ see page 17 ff				XX														
Mechanical Options																		
Medium Temperature Range																		
-40 °C ... +100 °C [-40 °F ... +212 °F]														S				
-40 °C ... +150 °C [-40 °F ... +302 °F], Ex _{max} : 135 °C [275 °F]														H				
-40 °C ... +70 °C [-40 °F ... +158 °F], Ex, compact														E				
-60 °C ... +200 °C [-76 °F ... +392 °F]														T				
Pressure Range																		
With rupture disc max. 4 bar [58 psi]														G				
Mechanical Design																		
Standard														S				
Face to Face Length																		
Standard (other length on request)														S				
Electronics Options																		
Electronics Type																		
Junction box, 1.4404 [316L]														H	Z	Z	S	
Meter mount, die cast aluminum housing for ½" NPT cable glands ¹⁰⁾														C				
Meter mount, die cast aluminum housing for M20x1.5 cable glands ¹⁰⁾														K				
Meter mount, stainless steel housing for ½" NPT cable glands ¹⁰⁾														M				
Meter mount, stainless steel housing for M20x1.5 cable glands ¹⁰⁾														O				
Meter mount electronics TCE 6000 ¹¹⁾														F				
Interface¹²⁾																		
RS485 (Modbus RTU)														S				
RS485 (Modbus RTU) and HART®														A				
RS485 (Modbus RTU) + FF (not with Ex)														B				
FF (Foundation Fieldbus®)														D				
RS485 (Modbus RTU) + USB (only TCE 6000)														F				
Not used														Z				
Supply Voltage																		
24 V DC																	D	
90 ... 264 V AC																	M	
Not used																	Z	
Options																		
Pressure compensation, 4 ... 20 mA input																		A
8 pin I/O connector (TCE 6000 only)																		B
Optical I/O (TCE 6000 only)																		C
No option																		S
EX-Protection																		
ATEX + IECEx Zone1: Group IIC or IIB, T2...T4																		Ex
ATEX Zone 2: II 3G Ex nA IIC, T2...T4 Gc																		Exn
cCSAus: Class 1, Division 1: Group A, B, C, D or C, D, T2...T4 ¹³⁾																		Ex1
ATEX+IECEX: Zone 1: Group IIC or IIB, T2...T4 and cCSAus: Class 1, Division 1: Group A, B, C, D or C, D, T2...T4(13) 14)																		Ex3
EAC (TR-CU): Group IIC or IIB, T2 ... T4 ¹³⁾																		ExR
Special Options																		
NOC (Net Oil Computer)																		01

⁹⁾ For connections not indicated with installation length, please contact manufacturer.
¹⁰⁾ For TCM compact version with Ex-protection temperature class T4 only.
¹¹⁾ Ex-protection only available in the option Exn. TCE 6000 electronic is not applicable for TCM 230K.
¹²⁾ Other interfaces on request.
¹³⁾ For Ex1, Ex3, EAC (TR-CU) the electronic is only available in aluminum housing.
¹⁴⁾ Only with remote electronics.



ORDERING CODE TCE TRANSMITTER (SERIES 8XXX)

	TCE	8	X	X	X	-	X	-	X	X	X	X	-	XX	-	XX	
Housing material: Aluminum	8	0															
Housing material: stainless steel 1.4404 [AISI 316L]	8	1															
Electronics for TCM 0325 to TCM 7900			0	1													
Electronics for TCM 028K to TCM 065K			1	1													
Electronics for TCM 230K			1	2													
Housing																	
Wall mount (housing for 1/2" NPT cable glands)																W	
Wall mount (housing for M20x1.5 cable glands)																I	
Panel mount ¹⁵⁾																S	
Panel mount, wide, for "Ex", "associated equipment" ¹⁵⁾																L	
Options																	
Interface¹⁶⁾																	
RS485 (Modbus RTU)																S	
R485 (Modbus RTU) + HART [®]																A	
Supply Voltage																	
24 V DC + 90 ... 264 V AC (only housing S+L)																B	
24 V DC																D	
90 ... 264 V AC (only housing W, I)																M	
Electronic Options																	
Standard																S	
Pressure compensation, 4 ... 20 mA input																A	
Cable Length																	
3 Meters [≈ 10 ft.], Standard (high temperature)																S (H)	
6 Meters [≈ 20 ft.] (high temperature)																B (I)	
10 Meters [≈ 33 ft.] (high temperature)																C (J)	
15 Meters [≈ 49 ft.] (high temperature)																D (O)	
20 Meters [≈ 65 ft.] (high temperature)																E (P)	
3 Meters [≈ 10 ft.], offshore cable																F	
D-SUB Connector, (housing L+S) separate cable required																N	
Ex-Protection																	
ATEX + IECEx Zone1: Group IIC or IIB, T2...T4																	Ex
ATEX Zone 2: II3G Ex nA IIC, T2...T4 Gc																	Exn
cCSAus: Class 1, Division 1: Group A, B, C, D or C, D, T2...T4 ¹⁷⁾																	Ex1
ATEX+IECEX, Zone 1: Group IIC or IIB, T2...T4 and cCSAus: Class 1, Div. 1: Group A, B, C, D or C, D, T2...T4 ¹⁷⁾																	Ex3
EAC (TR-CU): Group IIC or IIB, T2 ... T4 ¹⁷⁾																	ExR
Special Options																	
NOC (Net Oil Computer)																	01

¹⁵⁾ Only for TCE 80XX.

¹⁶⁾ Other interfaces on request.

¹⁷⁾ For Ex1, Ex3, EAC (TR-CU) the electronic is only available in aluminum housing.



TRICOR CONNECTION CABLE (TCC) FOR PANEL-MOUNTED HOUSING

Cable Specifications/Connections

Cable	Connector TCE	Connector TCM	Devices	TCC		X	X	-	X	X
				0	2					
Standard cable	SUB-D, 9-pin	cable end sleeves (8-pol.)	TCE 8**1-S- TCE 8**1-L-	0	2					
Standard cable	SUB-D, 9-pin/ Din-Rail mounting	cable end sleeves (8-pol.)	TCE 8**1-S- TCE 8**1-L-	0	4					
High temperature cable	SUB-D, 9-pin	cable end sleeves (8-pol.)	TCE 8**1-S- TCE 8**1-L-	0	9					
High temperature cable	SUB-D, 9-pin/ Din-Rail mounting	cable end sleeves (8-pol.)	TCE 8**1-S- TCE 8**1-L-	1	0					
Length										
3 meter (Standard)	[≈ 10 ft.]									0 3
6 meter	[≈ 20 ft.]									0 6
10 meter	[≈ 33 ft.]									1 0
15 meter	[≈ 49 ft.]									1 5
20 meter	[≈ 66 ft.]									2 0

ADDITIONAL ACCESSORIES

Accessories for TCE 8* electronic	Model Code
USB interface cable to RS485, 1.8 m (TRICOR configurator)	CON.USB.RS-ISO
IP65 Protection for TCE-80**-L	IPS 9-14
IP65 Protection for TCE-80**-S	IPS 9-9
Adapter TCE-80**-S and TCE-80**-L for rail mounting	HSA 96
Accessories for TCE 6000 electronic	Model Code
Remote display for TCE 6000	TRD 8001
Connection cable TRD 8001 to TCE 6000, 2 m	TRD-TCE-6-2
Connection cable TRD 8001 to TCE 6000, 5 m	TRD-TCE-6-5
USB Cable, USB to mini USB M12, 2 m	KAB-USB-TCE
RS485 to USB connector cable 3 m for TCE 6000; versions FSDS;FFDB, FSDC	KAB-RS485-TCE-ISO
Pneumatic Power Gen. Plug M8, 3 pin, 2.5 m cable for TCE 6000 Version FSDC; 7.5 W, 24 V DC	TCE 6000-FSDC-SET-PPG
Light pulse emitter and receiver, DIN-rail for TCE 6000 Version FSDC	OPTV-02/XO
Fiber optic cable for TCE 6000 Version FSDC for FOP 50/60, 10 m (5.5 mm)	LW-LA-10
Service and calibration	Model Code
DAkKS-Calibration (ILAC) according to DIN EN ISO/IEC 17025:2005	DAkKS-Kalibrierung
Oxygen cleaning TCM	Reinigung Sauerstoff TCM
Inspection certificate 3.1 according to DIN 50 049/EN 10204	3.WKZ-0100
TAG Plate 1.4404 [AISI 316L]	TCM-Tag-Plate-1.4404



SLIP ON, PROCESS CONNECTION DIM. + FACING ACC. ANSI B16.5
INSTALLATION LENGTH IN MM [INCH]

Process connection ¹⁸⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
½" ANSI flange class 150	AA	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
½" ANSI flange class 300	AB	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
½" ANSI flange class 600	AC	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
½" ANSI flange class 900	AD	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
½" ANSI flange class 1500	BV	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
½" ANSI flange class 2500	BE	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
¾" ANSI flange class 150	BA	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
¾" ANSI flange class 300	BB	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
¾" ANSI flange class 600	BC	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
¾" ANSI flange class 900	BD	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
¾" ANSI flange class 1500	AI	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
1" ANSI flange class 150	AE	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
1" ANSI flange class 300	AF	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
1" ANSI flange class 600	AG	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
1" ANSI flange class 900	AH	390 [15.35]	390 [15.35]			460 [18.11]	460 [18.11]	625 [24.61]		
1" ANSI flange class 1500	AQ	390 [15.35]	390 [15.35]			460 [18.11]				
1" ANSI flange class 2500	BN	390 [15.35]	390 [15.35]							
1½" ANSI flange class 150	AJ					460 [18.11]	460 [18.11]	625 [24.61]		
1½" ANSI flange class 300	AK					460 [18.11]	460 [18.11]	625 [24.61]		
1½" ANSI flange class 600	AL					460 [18.11]	460 [18.11]	625 [24.61]		
1½" ANSI flange class 900	AM					460 [18.11]	460 [18.11]	625 [24.61]		
1½" ANSI flange class 1500	BI					460 [18.11]				

¹⁸⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



SLIP ON, PROCESS CONNECTION DIM. + FACING ACC. ANSI B16.5
INSTALLATION LENGTH IN MM [INCH]

Process connection ¹⁹⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
2" ANSI flange class 150	AN							625 [24.61]	830 [32.68]	
2" ANSI flange class 300	AO							625 [24.61]	830 [32.68]	
2" ANSI flange class 600	AP							625 [24.61]	830 [32.68]	
2" ANSI flange class 900	AR							625 [24.61]	830 [32.68]	
2" ANSI flange class 1500	BU								830 [32.68]	
2½" ANSI flange class 150	BT								830 [32.68]	
2½" ANSI flange class 300	BY								830 [32.68]	
2½" ANSI flange class 600	BQ								830 [32.68]	
2½" ANSI flange class 900	BW								830 [32.68]	
3" ANSI flange class 150	AS							625 [24.61]	830 [32.68]	915 [36.02]
3" ANSI flange class 300	AT								830 [32.68]	915 [36.02]
3" ANSI flange class 600	AU								830 [32.68]	915 [36.02]
3" ANSI flange class 900	AV								830 [32.68]	915 [36.02]
4" ANSI Flange class 150	AW								830 [32.68]	915 [36.02]
4" ANSI flange class 300	AX								830 [32.68]	915 [36.02]
4" ANSI flange class 600	AY								830 [32.68]	915 [36.02]
4" ANSI flange class 900	AZ								830 [32.68]	915 [36.02]
5" ANSI flange class 150	BF									915 [36.02]
5" ANSI flange class 300	BG									915 [36.02]
5" ANSI flange class 600	BH									915 [36.02]
5" ANSI flange class 900	BJ									915 [36.02]
6" ANSI flange class 150	BM									915 [36.02]
6" ANSI flange class 600	BX									915 [36.02]

¹⁹⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



SLIP ON, PROCESS CONNECTION DIM. + FACING ACC. EN 1092-1 FORM B
INSTALLATION LENGTH IN MM [INCH]

Process connection ²⁰⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
DN 10, EN flange PN 40	DS	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 10, EN flange PN 63	DZ	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 10, EN flange PN 100	EA	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 10, EN flange PN 160	EB	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 10, EN flange PN 250	EC	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 10, EN flange PN 400	ED	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]					
DN 15, EN flange PN 40	DA	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
DN 15, EN flange PN 63	EF	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
DN 15, EN flange PN 100	DB	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]			
DN 15, EN flange PN 160	EG	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
DN 15, EN flange PN 250	EH	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
DN 15, EN flange PN 400	EI	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
DN 20, EN flange PN 40	DT					460 [18.11]	460 [18.11]			
DN 25, EN flange PN 40	DC	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
DN 25, EN flange PN 63	EJ	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
DN 25, EN flange PN 100	DD	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]	460 [18.11]	625 [24.61]		
DN 25, EN flange PN 160	DW	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
DN 25, EN flange PN 160 Mat.: 2.4602	DW							625 [24.61]		
DN 25, EN flange PN 250	DP	390 [15.35]	390 [15.35]	420 [16.54]	420 [16.54]	460 [18.11]				
DN 25, EN flange PN 400	DV	390 [15.35]	390 [15.35]			460 [18.11]				
DN 32, EN flange PN 40	DR					460 [18.11]	460 [18.11]	625 [24.61]		

²⁰⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



SLIP ON, PROCESS CONNECTION DIM. + FACING ACC. EN 1092-1 FORM B
INSTALLATION LENGTH IN MM [INCH]

Process connection ²¹⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
DN 40, EN flange PN 40	DE					460 [18.11]	460 [18.11]	625 [24.61]		
DN 40, EN flange PN 63	EK					460 [18.11]	460 [18.11]	625 [24.61]		
DN 40, EN flange PN 100	DF					460 [18.11]	460 [18.11]	625 [24.61]		
DN 40, EN flange PN 160	EL					460 [18.11]				
DN 40, EN flange PN 250	EM					460 [18.11]				
DN 40, EN flange PN 400	EN					460 [18.11]				
DN 50, EN flange PN 16	EO							625 [24.61]	830 [32.68]	
DN 50, EN flange PN 40	DG							625 [24.61]	830 [32.68]	
DN 50, EN flange PN 63	EP							625 [24.61]	830 [32.68]	
DN 50, EN flange PN 100	DH							625 [24.61]	830 [32.68]	
DN 65, EN flange PN 16	EQ								830 [32.68]	
DN 65, EN flange PN 40	DQ								830 [32.68]	
DN 65, EN flange PN 63	ER								830 [32.68]	
DN 65, EN flange PN 100	ES								830 [32.68]	
DN 80, EN flange PN 16	ET								830 [32.68]	915 [36.02]
DN 80, EN flange PN 40	DJ								830 [32.68]	915 [36.02]
DN 80, EN flange PN 63	EU								830 [32.68]	915 [36.02]
DN 80, EN flange PN 100	DK								830 [32.68]	915 [36.02]
DN 100, EN flange PN 16	EV								830 [32.68]	915 [36.02]
DN 100, EN flange PN 40	DL								830 [32.68]	915 [36.02]
DN 100, EN flange PN 63	EW								830 [32.68]	915 [36.02]
DN 100, EN flange PN 100	DM								830 [32.68]	915 [36.02]

²¹⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



SLIP ON, PROCESS CONNECTION DIM. + FACING ACC. EN 1092-1 FORM B
INSTALLATION LENGTH IN MM [INCH]

Process connection ²²⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
DN125, EN flange PN 16	EX									915 [36.02]
DN125, EN flange PN 40	DN									915 [36.02]
DN125, EN flange PN 63	EY									915 [36.02]
DN125, EN flange PN 100	DO									915 [36.02]
DN150, EN flange PN 16	DI									915 [36.02]
DN150, EN flange PN 40	DX									915 [36.02]

EN FLANGE WELD NECK
INSTALLATION LENGTH IN MM [INCH]

Process connection ²²⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
DN 32, PN40 DIN 2635 – 1.4404 [AISI 316L] Type C Face	VO					460 [18.11]	460 [18.11]	625 [24.61]		
DN 32, PN64 DIN 2636 – 1.4404 [AISI 316L] Type E Face	VP					460 [18.11]	460 [18.11]	625 [24.61]		
DN 32, PN100 DIN 2637 – 1.4404 [AISI 316L] Type E Face	VQ					460 [18.11]	460 [18.11]	625 [24.61]		

TRICLAMP
INSTALLATION LENGTH IN MM [INCH]

Process connection ²²⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
½" Triclamp	TA	220 [8.66]	220 [8.66]	250 [9.84]	250 [9.84]					
DN 25 Triclamp PN 16 DIN 32676	TL	210 [8.27]	210 [8.27]	240 [9.45]	240 [9.45]	460 [18.11]	460 [18.11]	625 [24.61]		

²²⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



FEMALE THREAD
INSTALLATION LENGTH IN MM [INCH]

Process connection ²³⁾	Code	TCM 0325	TCM 0650	TCM 1550	TCM 3100	TCM 5500	TCM 7900	TCM 028K	TCM 065K	TCM 230K
¼" NPT female thread	FJ	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]					
¾" NPT female thread	FL	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]	460 [18.11]	460 [18.11]			
½" NPT female thread	FK	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]	460 [18.11]	460 [18.11]			
2" NPT female thread	FQ								880 [34.65]	
¼" G. female thread	FB	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]					
¾" G, female thread	FR	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]					
¾" G, female thread	FC	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]	460 [18.11]	460 [18.11]			
½" G, female thread	FA	110 [4.33]	110 [4.33]	140 [5.51]	140 [5.51]	460 [18.11]	460 [18.11]			

²³⁾Connections without installation length are not possible or need manufacturer release. Please contact the manufacturer.



N & S AMERICA

AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIEA/PACIFIC, MIDDLE EAST

KEM Instruments SEA Pte. Ltd.
1 Magazine Road #04-01
Central Mall Office Tower
Singapore 059567
+65 6347 6162

CHINA

KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, RuiPu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567

REST OF WORLD

KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100